


VTC-B501AF

5MP HD Analog IR Bullet Camera




- 5MP@20fps/4MP@30fps image, high resolution, true color
- AHD / TVI / CVI/CVBS standard and lossless video output
- Up to 1500 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- Support OSD menu
- High speed, long distance and real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night, WDR
- Support noise reduction function
- 30 ~ 50m IR night view distance
- IP67 ingress protection
- Support COC

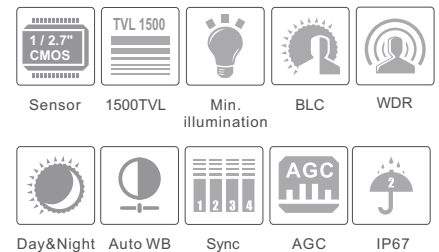

SPECIFICATIONS

| Model | VTC-B501AF |
|-----------------------|--|
| Specifications | |
| Camera | |
| Image Sensor | 1 / 2.7 "CMOS |
| Resolution | 5MP |
| Image Size | 2560 x 1936 |
| Video Output | AHD / TVI / CVI / CVBS |
| Image System | PAL / NTSC |
| Electronic Shutter | Auto |
| IR Distance | 30 ~ 50 m |
| Frame Rate | 5MP @20fps |
| Min. Illumination | Color : 0.01 lux@F1.2, AGC ON; B/W : 0 lux with IR |
| Lens | 2.8~12mm, Motorized zoom lens |
| Lens Mount | D14 |
| S / N Ratio | ≥52dB (AGC OFF) |
| Ingress Protection | IP 67 |
| Functions | |
| Function Control | OSD (COC Control) |
| Day & Night | ICR |
| Digital WDR | Yes |
| Digital NR | Yes |
| AGC | Yes |
| Auto White Balance | Yes |
| BLC | Yes |
| LSC | Yes |
| Defog | No |
| HLC | Yes |
| Sharpness | Yes |
| Mirror | Yes |
| Smart IR | Yes |
| Image Setting | Yes |
| Defect Correction | Yes |
| Language | 13 languages |
| Angle Adjustment | Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360° |
| Others | |
| Power Supply | DC12V (± 10%) |
| Power Consumption | IR OFF : < 1W; IR ON : < 6W |
| Working Environment | - 30 °C ~ 50 °C, 10 % ~ 90 % (relative humidity) |
| Dimensions (mm) | 217.7 x 80.5 x 80.5 |
| Weight (net) | Approx. 0.57KG |

DIMENSIONS

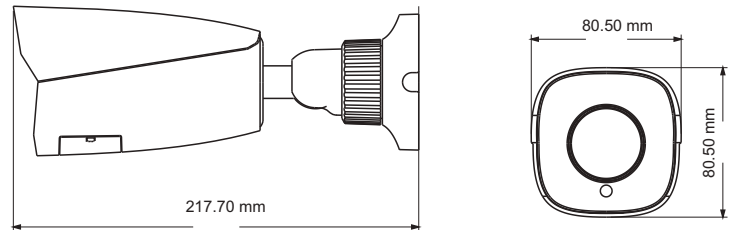

AVAILABLE ACCESSORIES



AVAILABLE MODEL

| | | |
|-----------------|------------|---------------------|
| Available Model | VTC-B501AF | Motorized zoom lens |
|-----------------|------------|---------------------|