


VN-LED43A

43"(4K) Professional LED Monitor

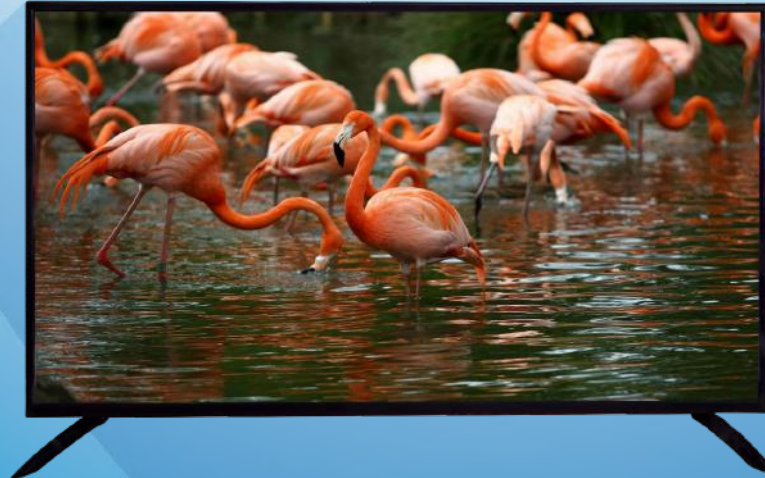

- HD: 3840*2160, 4 times higher than normal monitor.
- Turn on the screen to automatically detect the resolution of the input signal in the upper right corner of the screen.
- Clear: delicate and realistic, conveying true colors, showing the true colors.
- Bright: The quality is improved, only for better presentation.
- Adopt industrial screen, high brightness, high contrast.
- High-precision standard regulated power supply, specially designed for industrial equipment, supporting 24 hours × 365 days of uninterrupted work.
- It adopts full metal casing, strong structure, fireproof, moisture proof and shockproof, especially suitable for equipment that is susceptible to electromagnetic interference.
- Adopt 10bit image chip processing technology, high pixel progressive scan, fine texture.
- Support intelligent 3D noise reduction, eliminate afterimage function, dynamic brightness, contrast color optimization technology.
- Apply the world's leading LED driver solution to accurately restore the front-end signal, with a strong sense of reality.
- LED has small volume, low energy consumption, zero radiation, stable image, no impact on the eyes, natural health.
- 6.5 ms extremely fast response, avoiding the tailing phenomenon of images in high speed operation.
- Using nano technology, the picture is more three-dimensional, transparent.
- This machine also comes with a splicing function, no external splicer.

SPECIFICATIONS

Model	VN-LED43A
Product Type:	Professional Monitor
Screen Size:	43"
Screen Type:	LED
Screen Ratio:	16:9
Brightness	400nit
Contrast Ratio:	5000:1
Response Time:	6.5 ms
Viewing Angle:	Wide
Display Color:	1.07B
Clearness:	3840*2160
Control Method:	Panel, Infrared
Input Port:	HDMI*2 VGA*1 USB*1 DVI*1 AV*1 232 *1
Output Port:	232 * 2
Audio Output:	2 * Stereo Speakers
Power Supply Mode:	110-220V/0.7A
Power frequency:	50-60Hz
Total Power:	75W
Casing:	Professional fireproof iron shell, plastic frame&plastic base
Installation Method:	Base, Wall Mount
Dimensions:	966mm*563mm*83mm,not including the foot height & foot Height: 46mm'
Product Weight:	7.3kg
Packing Size:	1000mm *625mm *110mm
Gross Weight:	9kg
Working Environment Temperature:	0 °C ~ 50 °C
Humidity:	0 % ~ 90%
Storage Temperature:	-20 °C ~ 60 °C

DIMENSIONS

