


### VTC-B500EL

5MP HD Analog IR Dome Camera



- 1 / 2.5" CMOS Sensor
- Image Resolution: 5M(2592 x 1944)
- AHD / CVI / TVI / CVBS lossless video output
- Up to 1000 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- Support OSD menu
- High speed, long distance, real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night
- Support noise reduction function
- 25m IR night view distance
- IP67 Ingress Protection
- Support Dip Switch (Optional)
- Support 960H CVBS output

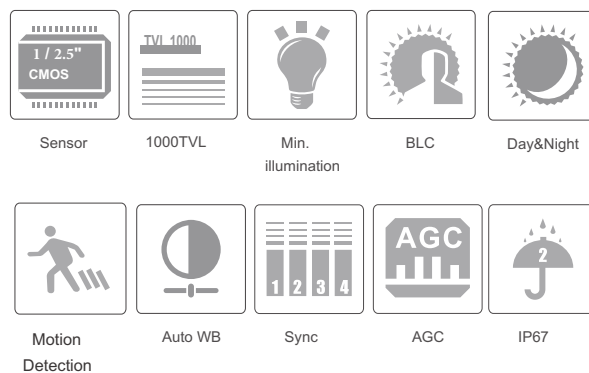

### SPECIFICATIONS

Model Specifications	VTC-B500EL
<b>Camera</b>	
Image Sensor	1 / 2.5 "CMOS
Resolution	5MP
Image Size	2592 x 19440
Video Output	AHD / TVI / CVI / CVBS
Image System	PAL / NTSC
Electronic Shutter	Auto; 1/25s~1/50000s(PAL); 1/30s~1/50000s(PAL)
IR Distance	25m
Frame Rate	30fps(60Hz); 25fps(50Hz)
Min. Illumination	Color : 0.01 lux@F2.0, AGC ON; B/W : 0 lux with IR
Lens	2.8 mm
Lens Mount	M12
S / N Ratio	≥52dB ( AGC OFF )
Ingress Protection	IP 67
<b>Functions</b>	
Scanning System	Progressive Scan
Day & Night	ICR
WDR	DWDR
3D NR	Yes
Global Exposure	No
Central Exposure	No
AGC	Yes
Auto White Balance	Yes
BLC	Yes
LSC	Yes
HLC	Yes
Freeze	Yes
Mirror	No
Defog	No
Sharpness	Yes
Infrared LED	42μ x 2PCS
Motion Detection	Yes
Privacy Mask	Yes
Defect Correction	No
Language	3 languages
UTC	Yes
<b>Others</b>	
Power Supply	DC12V ( ± 15% )
Power Consumption	IR OFF : < 1.5W; IR ON : < 4.5W
Working Environment	- 20 °C ~ 60 °C, 10 % ~ 95 % ( relative humidity )
Dimensions ( mm )	Φ169(W) x 67.5(H) x 70(D)mm
Weight ( net )	Approx. 0.5 KG

### AVAILABLE MODEL

Available Model	VTC-B500EL
-----------------	------------

### AVAILABLE ACCESSORIES

