


32CH AI NVR

16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/720P HD NVR



VTN-332A3

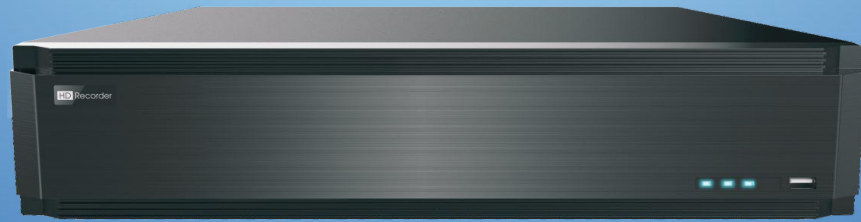

4K Output



HD IPC



DDNS



Network



PTZ



Audio



MIC



Mobile



CMS



USB



Mouse



E-mail



STD



FR



VCA

VidoNet VTN-332A3 supports 32CH 16MP/12MP /8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 1280 ×1024 / 960P /720P high definition IP video input, which adopts the advanced SOC technique to ensure high definition recording in each channel and realize outstanding robustness of the system.



VidoNet VTN-332A3 supports 32 CH IP input, simultaneous 16 CH playback, and 4K high definition display. So it can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.



Features

- Support 32CH 16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280x1024/960P/720P/960H/D1/CIF IP input
- H.265S/H.265+/H.265/H.264 coding
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-mode recording: manual / timed / motion / sensor/ POS / AI recording
- Playback: 16 CH simultaneous playback
- Search: time slice, time, event, tag, smart and target database search
- Support face detection and comparison
- Support multiple VCA (Video Content Analytics) events, such as region intrusion, tripwire, etc.
- Support OS information overlay on live view and playback
- Support RAID 0, 1, 5, 6, 10
- Support N+1 Hot spare
- Express and flexible backup via USB, network and so on
- Preview, record, playback, backup and remote access are supported
- DHCP, DDNS, PPPoE network protocol, etc.
- Compatible with third-party IPCs, such as ONVIF, DISS, Hikvision, Dahua, etc.
- Remote control via Web Client or CMS : preview, playback, backup, PTZ and configuration
- Multi-user online simultaneously
- Authorization management, log view and device status view
- 4K output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QR Code scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Android OS

Dimensions

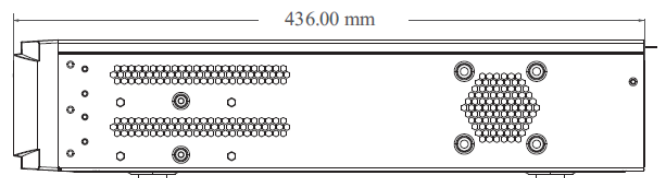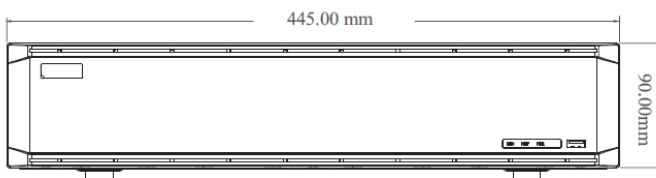

Specifications

Model	VTN-332A3	
System	OS	Embedded Linux
Video	IP Video Input	32
	Network Bandwidth	Incoming: 320Mbps Outgoing: 320Mbps
	Resolution	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280x1024/960P/720P/960H/D1/CIF
	Output	HDMI1: 3840×2160@60, 3840×2160@30, 1920×1080, 1280×1024, 1024×768 HDMI2: 3840×2160@60, 3840×2160@30, 1920×1080, 1280×1024, 1024×768 VGA×1: 1920×1080, 1280×1024, 1024×768 (VGA and HDMI1 output the same video source)
	Multi-screen Display	Main output: 1/4/6/8/9/13/16/25/32/36 AUX output: 1/4/6/8/9/13/16
	Compression	H.264/H.265/H.265+/H.265S
Audio	Network input	32
	Local Input	RCA×1 (for two-way talk)
	Local Output	RCA×1
	HDMI Audio Output	Support
	Compression	G.711(U/A)
Record	Resolution	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280x1024/960P/720P/960H/D1/CIF
	Frame Rate	N:30fps; P:25fps
Playback	Simultaneous Playback	16CH
	Search	Time slice/time/event/tag/smart search
	Function	Play, pause, FF, Rewind, digital zoom, previous frame, next frame, etc.
Decoding Capability	Live View/ Playback	Non-AI mode: 4×16MP@30fps, 9×6MP@30fps, 16×4MP@30fps AI mode: 4×12MP@30fps, 9×5MP@30fps, 16×3MP@30fps
Alarm	Mode	Manual, sensor, motion, exception, smart events, etc.
	Input	16CH
	Output	4CH
	Triggering	Record, snapshot, preset, e-mail, etc.
Face	Face Detection Performance (AI by IPC)	32CH
	Face Detection Performance (AI by Device)	4CH(4MP)
	Face Match Performance	16CH
	Comparison Capability	36 pictures/second
	Face Picture Database	32 libraries 10000 face pictures
	Face Picture Search	Search by picture is supported
	Database Management	Add, modify, delete and search face pictures
	Face Picture Adding	Add face pictures through APP, WEB and external import
	Face Picture Comparison	Supports successful face recognition alarm and stranger match alarm
	Track	Track display on a map
	Statistical Graph of Information	Bar graph

