




DI-PT18XD200

Features

- ❖ 1/2.9"SONY 2.1MP CMOS Sensor
- ❖ AHD / CVI / TVI 3 IN 1
- ❖ AHD / TVI / CVI : 2M @ 25fps
- ❖ f = 5.35mm-96.3mm
- ❖ 18X Optical Zoom
- ❖ Support ICR Switch, True day / night
- ❖ IR Distance Max. 120m
- ❖ Support Noise Reduction
- ❖ IP66 Ingress Protection
- ❖ Support OSD Manual & UTC
- ❖ Support Pelco D & P

Dimension

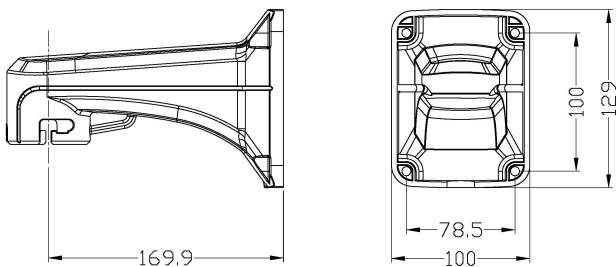

Specifications

Model No.	DI-PT18XD200
Specifications	
Image Sensor	1/2.9" SONY 2.1MP CMOS Sensor
Image Resolution	2M:1920*1080
Video Output	3IN1: AHD/HD-TVI/CVBS
Focus Length	5.35mm-96.3mm
Focus Control	18X Optical Zoom
Electronic Shutter	Auto; 1 / 25s ~ 1 / 50,000s (PAL); 1 / 30s ~ 1 / 60,000s (NTSC)
Horizontal Rotation Speed	120°/S
Horizontal Rotation Range	0°~360°
Tilt Rotation Speed	60°/s
Tilt Rotation Range	0°~93°
Preset Points	220
Guard Tours	3 groups
Guard Points	Max.16 points
S / N Ratio	≥ 50dB
TV System	PAL/NTSC
Infrared LED	42x6PCS IR LEDS + 2PCS Laser Lamp
IR Range	120m
Day-night mode	AUTO
UTC	Support
RS485	Support
Weatherproof	IP66
Operating Temperature	Indoor: 0°~ +40° Outdoor: -40°~ +60°
Operating Humidity	≤90% Non Condensing
Power	DC12V 4A
Lightning Protection	Transient voltage 6000V
Size of Package (LxWxH)	31x31x44(cm)