

64 CH NVR

12MP/8MP/6MP/5MP/4MP/3MP/1080P/720P HD NVR



VTN-464



VTN-464 supports 64CH 12MP / 8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 1280 × 1024 /

960P / 720P high definition IP video input, which adopts the most advanced

SOC technique to ensure high definition recording in each channel and

realize outstanding robustness of the system.

VTN-464 supports 64CH IP input, simultaneous 16 CH

playback, and 4K high definition display. The series of products can meet

different security requirements of home, financial, commerce, enterprise, transportation and

government, etc.



SPECIFICATIONS



Model		VTN-464
System	OS	Embedded Linux
Video	IP Video Input	64 CH
	Incoming Bandwidth	640Mbps
	Outgoing Bandwidth	Display Priority: 128Mbps Network Priority: 640Mbps
	IP Video Input Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
	Output	HDMI1 : 3840 × 2160@60fps / 3840 × 2160@30fps/ 1920 × 1080 / 1280 × 1024 / 1024 × 768 HDMI2: 1920 × 1080 / 1280 × 1024 / 1024 × 768 HDMI3: 1920 × 1080 / 1280 × 1024 / 1024 × 768 HDMI4: 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA × 1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768
	Multi-screen Display	1/4/6/8/9/13/16/25/32/36/64
	Compression	H.265S/H.265+/H.265/H.264
Audio	Network Input	64CH IPC audio input
	2-way Audio	RCA × 1
	Local Output	RCA × 1
	HDMI Audio Output	Yes
	Compression	G.711(U/A)
Record	Record Stream	Dual stream recording
	Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
	Frame Rate	25fps (PAL) / 30fps(NTSC)
	Mode	Manual/timed/motion/sensor/POS/AI recording
Playback	Simultaneous Playback	Max 16 CH
	Search	Time slice / time / event / tag / smart search
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
Decoding Capability	Live/Playback	1CH 12MP/ 4CH 5MP/9CH 720P/16CH 720P
Alarm	Mode	Manual, sensor, motion, exception, smart events
	Input	24 CH local alarm input; IPC alarm input supported
	Output	8 CH
Face	Face Detection Performance (AI by IPC)	64 CH
	Face Detection Performance (AI by Device)	4CH
	Face Match Performance	16CH
	Comparison Capability	36 pictures / second
	Face Picture Database	32 libraries 10000 Face Pictures
	Face Picture Search	Search by picture is supported
	Database Management	Add, modify, delete and search face pictures
	Face Picture Adding	Add face pictures through APP, WEB and external import
	External face picture enrollment	Resolution: 128 × 128 ~ 1920 × 1080 Size: less than 70KB Format : jpg, jpeg
	Face Picture Comparison	Support allow list, block list or stranger match alarm
	Face Track	Yes
	Map of Face Track	Resolution: ≤ 2560 × 1920 Size: ≤ 512KB Format : jpg, jpeg

Face	Statistic Graph of Face Information	Bar graph
	Statistic Mode of Face Information	Statistics by day, week, month, quarter as well as customized time period
Network	Interface	Rj45 10 / 100 / 1000 Mbps × 2
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP, HTTP, HTTPS, 802.1x, RTSP, ONVIF, etc.
	Client Connection	Max. 20 users access
Mobile Device	OS	iOS, Andriod
Storage	HDD Interface	SATA × 16, max 10T per HDD; e-SATA × 1
	RAID Type	RAID0, 1, 5, 6, 10
Backup	Local Backup	U disk, USB mobile HDD
	Network Backup	Yes
External Interface	USB	USB 2.0 × 2, USB 3.0 × 1
	Remote Controller	Optional
	RS 485	Yes (full-duplex), connect to PTZ or keyboard
	RS 232	Yes
	Reset	Yes
Others	Power Supply	ATX 300W
	Consumption	≤ 50W (without HDD)
	Dimensions	437mm×483mm×143mm
	Working Environment	-15 ~ 50 °C, Humidity: 10% ~ 90%
	Certificate	CE, FCC
	Environment Protection	Directive EU RoHS, WEEE(2012/19/EU) , Directive 94/62/EC and REACH(EC1907/2006)

Features

- Support 64CH 12MP/8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 960P / 1280 × 1024 / 720P IP video input
- H.265S/H.265+/H.265/H.264 coding
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-mode recording: manual / timed / motion / sensor / POS / AI recording
- Playback : 16 CH simultaneous playback
- Search : time slice, time, event, tag, smart and target database search
- Support face detection and comparison
- Support multiple VCA (Video Content Analytics) events, such as object abandoned/missing, region intrusion, tripwire, video exception, etc.
- Support POS information overlay on live view and playback
- Support RAID0, 1, 5, 6, 10
- Express and flexible backup via USB, network and so on
- Pentaplex : preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol
- Compatible with third-party IPCs, such as ONVIF, Hikvision, etc.
- Remote control via Web Client or CMS : preview, playback, backup, PTZ and configuration
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Multi-user online simultaneously
- Authorization management, log view and device status view
- 4K output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QRCode scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Andriod OS

DIMENSIONS

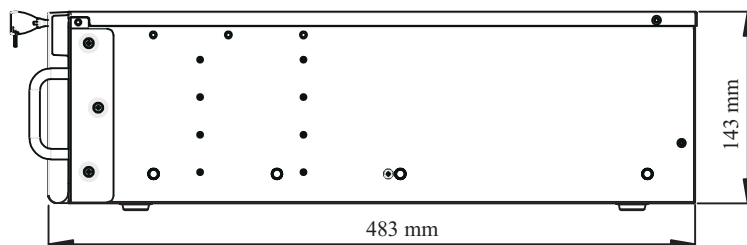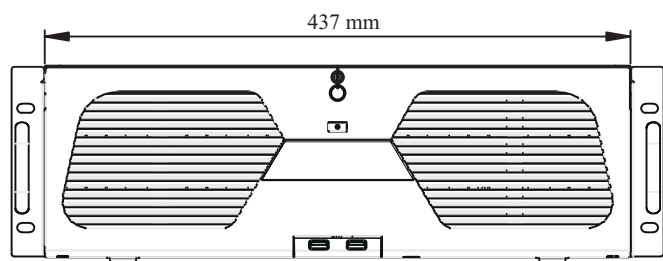

Rear Panel

